


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

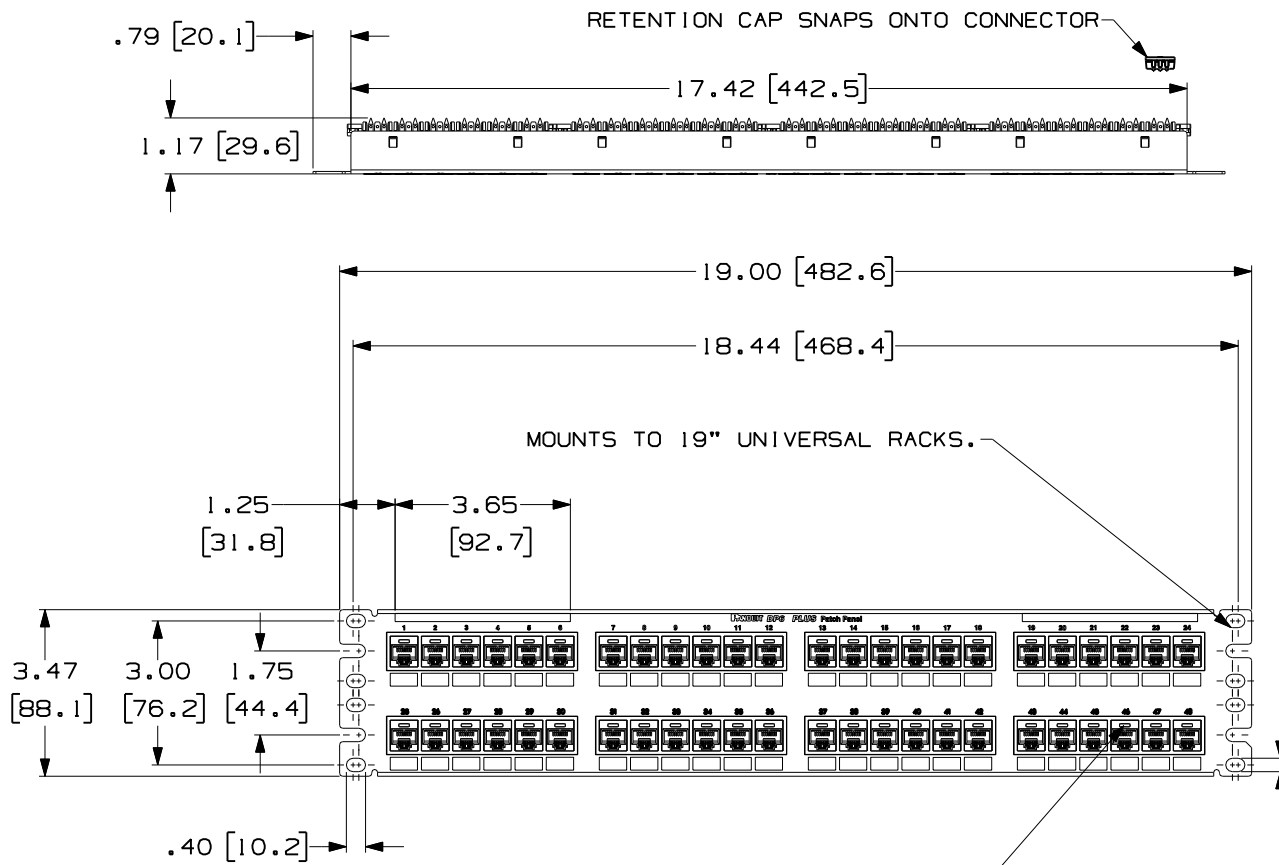

PANDUIT PART NO.	WEIGHT (APPOX.)
DP48688TGY	2.2 lb (997.9 g)

- NOTES:
- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
 - MATERIAL:
 PANEL HOUSING: STEEL
 RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
 - 48 PORT PATCH PANEL 8 POSITION 8 WIRE.
 - THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
 - FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) M6x1x15MM METRIC SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
 - DIMENSIONS IN BRACKETS ARE IN METRIC.
 - USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
 - RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

CID**-C, PHONE OR DATA ICON LOCATED HERE, IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

MODEL FILENAME M02088AB_2RU_48PORT_PANEL_ASSY_05	SIZE A
DRAWING FILENAME M02479JE_DC241_00A	
TITLE DP6 PLUS 48 PORT PATCH PANEL CUSTOMER DRAWING	
PANDUIT ™ CORP. TINLEY PARK, ILL 60477	I.I. NUMBER
	PRODUCT SPEC
THIRD ANGLE PROJECTION	WORK INSTRUCTION
	SCALE .25 TO 1
DRAWN BY LZ	REVIEW DRAWING NUMBERS
DATE 3-4-06	PART NO. SEE CHART
CHK'D	DRAWING NO. 02479-241

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-4-06	LZ		RELEASED TO PRODUCTION	02479-241				